

AD-753 487

COMPOSITION FOR THE IMPREGNATION OF
WOOD

V. T. Lebedev, et al

Foreign Technology Division
Wright-Patterson Air Force Base, Ohio

17 November 1972

DISTRIBUTED BY:

NTIS

National Technical Information Service
U. S. DEPARTMENT OF COMMERCE
5285 Port Royal Road, Springfield Va. 22151

AD753487

FTD-HT-23-1122-72


FOREIGN TECHNOLOGY DIVISION



COMPOSITION FOR THE IMPREGNATION OF WOOD

by

V. T. Lebedev, V. Ya. Novikov, et al.

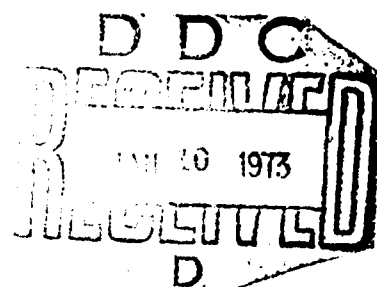

Approved for public release;
distribution unlimited.

Reproduced by
**NATIONAL TECHNICAL
INFORMATION SERVICE**
U S Department of Commerce
Springfield VA 22151

7

R

UNCLASSIFIED
Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Foreign Technology Division Air Force Systems Command U. S. Air Force		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP	
3. REPORT TITLE COMPOSITION FOR THE IMPREGNATION OF WOOD			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Translation			
5. AUTHOR(S) (First name, middle initial, last name) Lebedev, V.T.; Novikov, V.Ya.			
6. REPORT DATE 1 November 1968		7a. TOTAL NO. OF PAGES 7	7b. NO. OF REFS
8a. CONTRACT OR GRANT NO.		8b. ORIGINATOR'S REPORT NUMBER(S) FPI-PT-23-1122-72	
8. PROJECT NO. 7343		8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c.			
d.			
10. DISTRIBUTION STATEMENT Approved for public release; distribution unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY Foreign Technology Division Wright-Patterson AFB, Ohio	
13. ABSTRACT Wood is strengthened by impregnation with a mixt. of 70-93% methyl methacrylate and 30-7% beta, beta-1-dichloroethyl vinylphosphonate. AA1213458			

- 1 -

DD FORM 1473
1 NOV 66

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Wood Methyl Methacrylate Chlorohydrocarbon Organic Phosphate Chemical Patent						

- 11 -

UNCLASSIFIED

Security Classification

EDITED TRANSLATION

COMPOSITION FOR THE IMPREGNATION OF WOOD

By: V. T. Lebedev, V. Ya. Novikov, et al.

English pages: 2

Source: USSR Patent No. 286197
(Appl. No. 1280447/29-33,
November 1, 1968), 1971,
1 page.

Translated by: Charles T. Ostertag Jr.

Approved for public release;
distribution unlimited.

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-AFB, OHIO.

U. S. BOARD ON GEOGRAPHIC NAMES TRANSLITERATION SYSTEM

Block	Italic	Transliteration	Block	Italic	Transliteration
А а	<i>А а</i>	A, a	Р р	<i>Р р</i>	R, r
Б б	<i>Б б</i>	B, b	С с	<i>С с</i>	S, s
В в	<i>В в</i>	V, v	Т т	<i>Т т</i>	T, t
Г г	<i>Г г</i>	G, g	У у	<i>У у</i>	U, u
Д д	<i>Д д</i>	D, d	Ф ф	<i>Ф ф</i>	F, f
Е е	<i>Е е</i>	Ye, ye; E, e*	Х х	<i>Х х</i>	Kh, kh
Ж ж	<i>Ж ж</i>	Zh, zh	Ц ц	<i>Ц ц</i>	Ts, ts
З з	<i>З з</i>	Z, z	Ч ч	<i>Ч ч</i>	Ch, ch
И и	<i>И и</i>	I, i	Ш ш	<i>Ш ш</i>	Sh, sh
Й й	<i>Й й</i>	Y, y	Щ щ	<i>Щ щ</i>	Shch, shch
К к	<i>К к</i>	K, k	Ъ ъ	<i>Ъ ъ</i>	"
Л л	<i>Л л</i>	L, l	Ы ы	<i>Ы ы</i>	Y, y
М м	<i>М м</i>	M, m	Ь ь	<i>Ь ь</i>	'
Н н	<i>Н н</i>	N, n	Э э	<i>Э э</i>	E, e
О о	<i>О о</i>	O, o	Ю ю	<i>Ю ю</i>	Yu, yu
П п	<i>П п</i>	P, p	Я я	<i>Я я</i>	ya, ya

* ye initially, after vowels, and after ъ, ь; e elsewhere.
 When written as ѣ in Russian, transliterate as yě or ʹ.
 The use of diacritical marks is preferred, but such marks
 may be omitted when expediency dictates.

COMPOSITION FOR THE IMPREGNATION OF WOOD

V. T. Lebedev, V. Ya. Novikov,
S. P. Sheremetov, F. V. Dolinskiy,
G. V. Shiryayeva, V. L. Karpov,
V. V. Blinov, and V. I. Toropov

Compositions of monomers are known for strengthening wood by means of impregnation and polymerization with ionizing radiation. The known compositions of monomers do not yield the necessary strength of wood and parts made from it.

The purpose of the invention is increasing the durability of wood and lengthening the service period of parts made from it by means of impregnation with a composition containing methyl methacrylate in a quantity of 70-93% and $\beta\beta'$ -dichloroethyl ether of vinyl phosphonic acid in a quantity of 30-7% of the volume of the mixture.

The procedure is the following. The wood is evacuated, impregnated with a mixture of monomers of methyl methacrylate and $\beta\beta'$ -dichloroethyl ether of vinyl phosphonic acid in a ratio of 3:1, and polymerized by means of ionizing radiation, for example, the gamma-rays of Co^{60} in an inert medium at an irradiation dose of 3-5 Mrad.

Subject of Invention

A composition for the impregnation of wood on a base of monomers is *characterized* by the fact that for the purpose of increasing the durability of wood the composition contains 70-93% methyl methacrylate and 30-7% $\beta\beta'$ -dichloroethyl ether of vinyl phosphonic acid.